

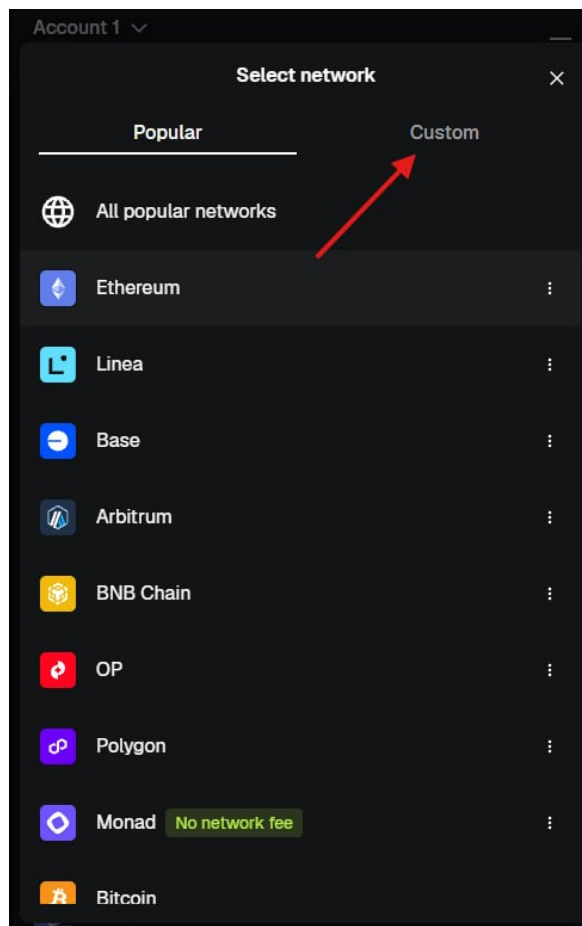


AirdropChain Wallet Setup

1. Open Metamask wallet. [Download here](#)
2. Add AirdropsChain network:


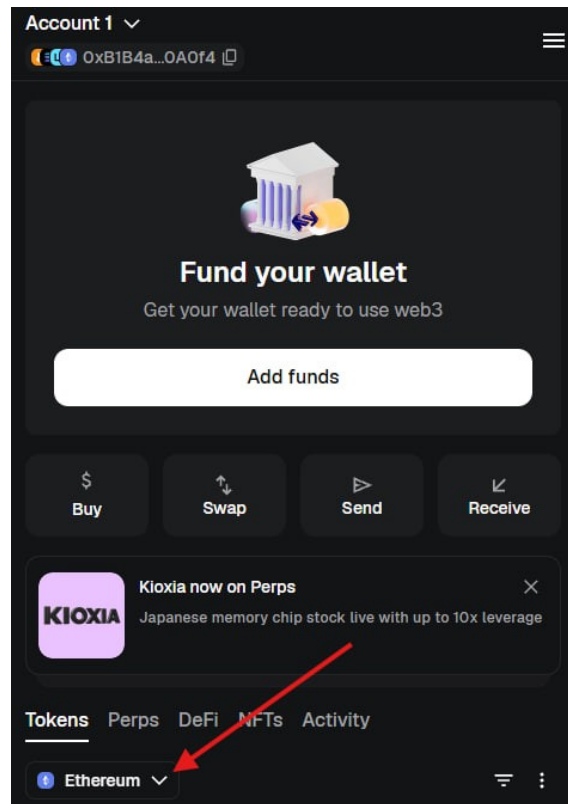


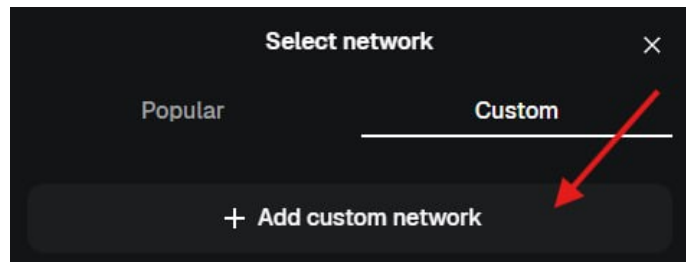

Network data:
Name: AirdropsChain
RPC URL: <https://airdrops.bot/rpc>
Chain ID: 20262106
Symbol: AIR



A screenshot of a mobile application interface titled "Add network". It contains several input fields, each with a red underline indicating the entered text: "Network name" with "AirdropsChain", "Default RPC URL" with "airdrops.bot/rpc", "Chain ID" with "20262106", "Currency symbol" with "AIR", and "Block explorer URL" with "Add a URL". At the bottom is a white "Save" button. A red arrow points from the top right towards the "Save" button.


3. Switch network to AirdropsChain:

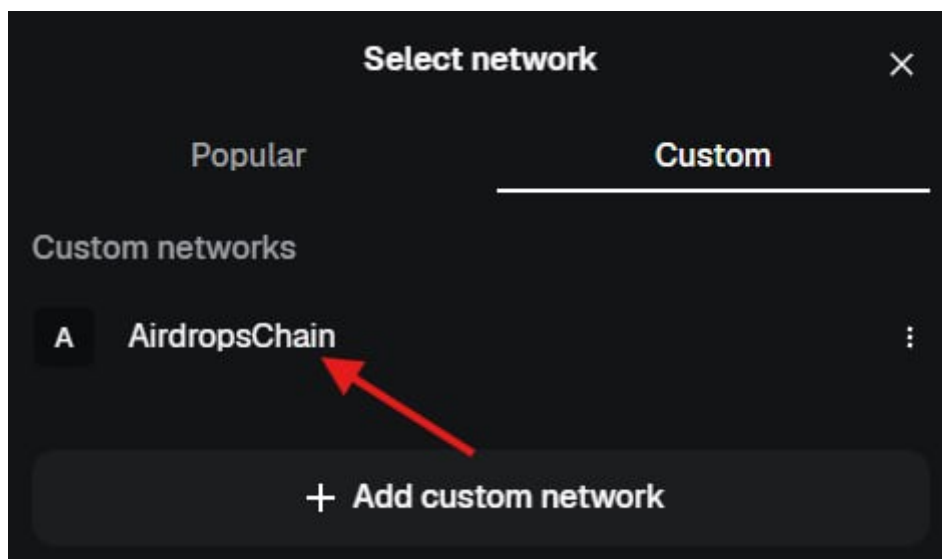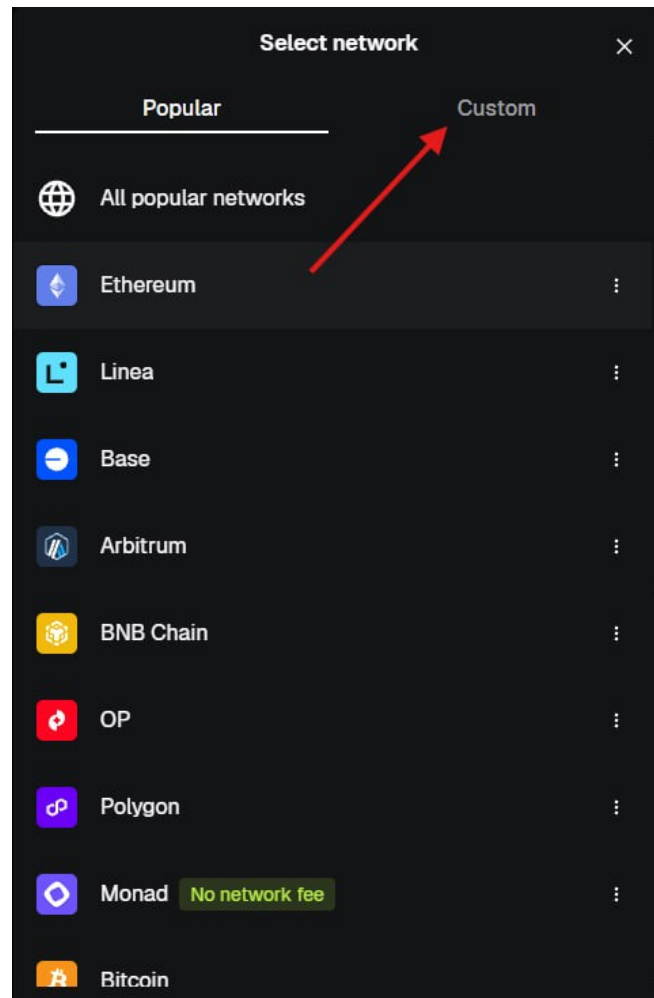


How to add ERC-20 Token

1. Copy token contract address.
2. Add token to metamask:

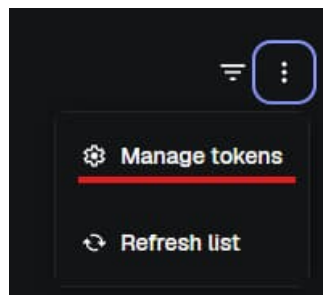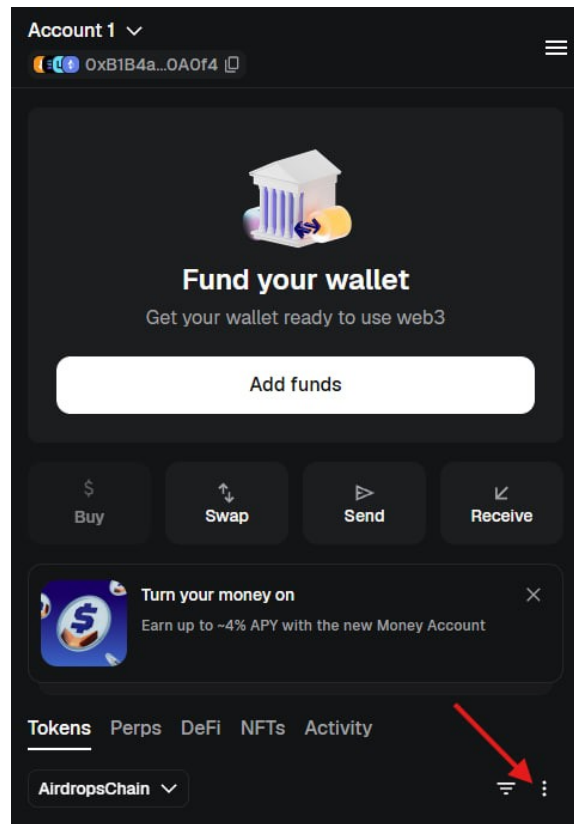

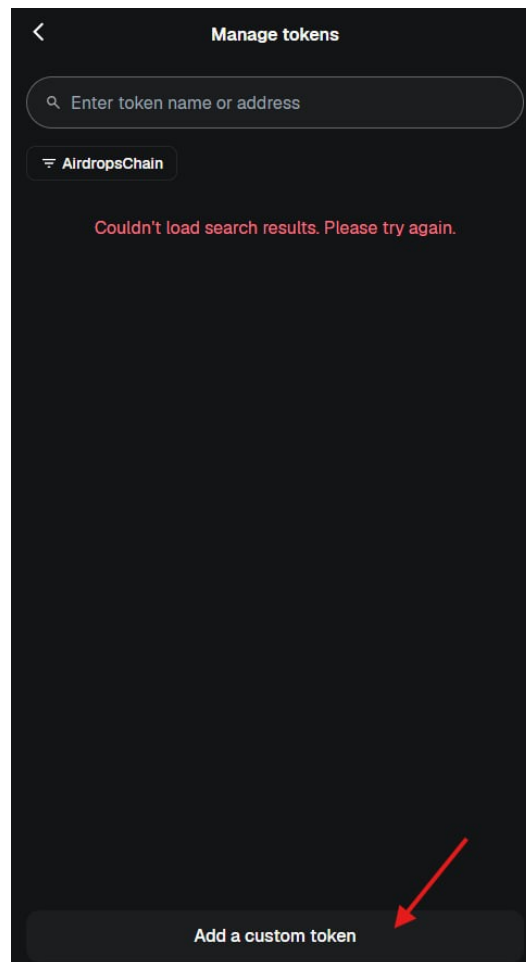

Paste token contract address:

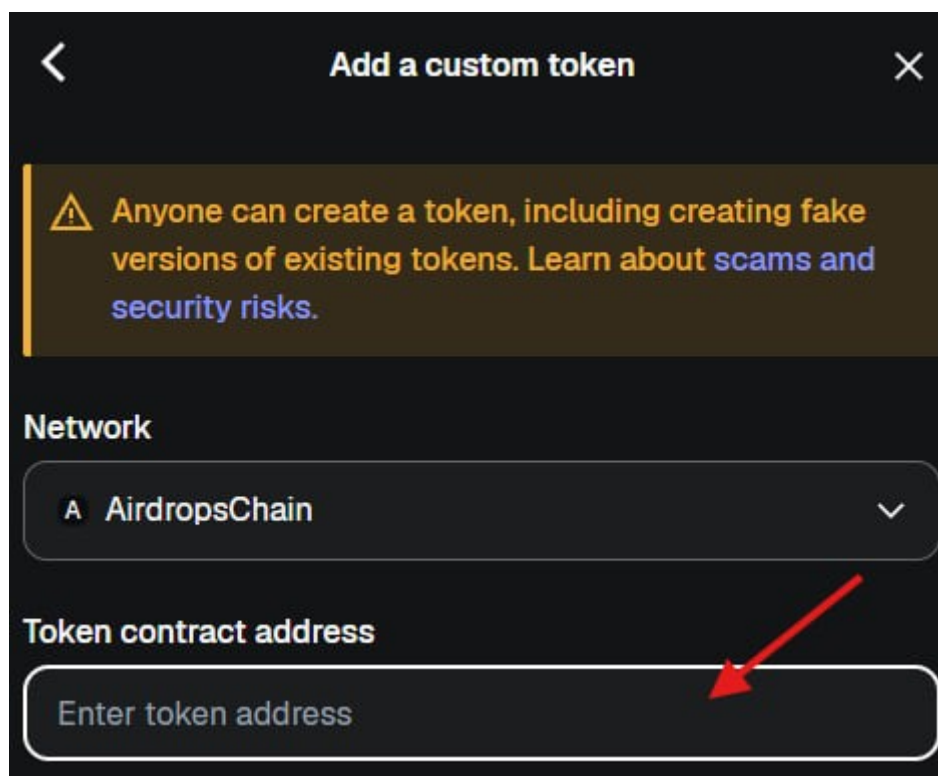



Add a custom token



Anyone can create a token, including creating fake versions of existing tokens. Learn about [scams and security risks](#).

Network

A AirdropsChain



Token contract address

0x164c4870b6f71132f6ab09be006a1dc67e2793cf

Token symbol

COOL

Token decimal

0

Add token



